


	<b>RIV+ SNCF</b>	<b>DB</b>	<b>SNCB</b>	<b>SBB</b>	<b>FS</b>
Loading gauge	4280 mm	4650 mm	4600 mm	4500 mm	4300 mm
Height between lower and upper deck	1725 mm	1725 mm	1725 mm	1725 mm	1725 mm
Upper deck loading height	1635 mm	2005 mm	1995 mm	1855 mm	1645 mm



Speed conditions	S
Tare	Kg 27.200
Length over buffers	mm 26.240
Nominal wheel diameter	mm 760
Maximum empty/load speed	Km/h 100
Minimum radius within curves	m 75
Overall carrying capacity	Kg 18.000
Maximum load on the lower deck	Kg 9.000
Maximum load on the upper deck	Kg 9.000
Maximum concentrated load on the lower deck	Kg 750
Maximum load on the upper deck	Kg 550
Loading length on the lower deck	mm 25.380
Loading ramp of the upper deck	mm 25.870
Net opening between pillars	mm 2.670
Net opening between decks	mm 1.725
Loading ramp of the upper deck	Minimum angle 8° / Maximum angle 10°
Standard double link suspension	
Trapezoidal springs	
Automatic compressed-air brake type Westinghouse	

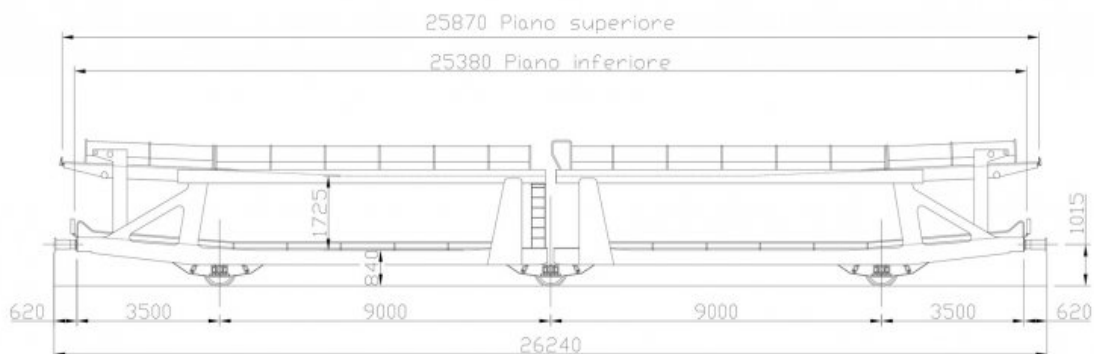